560_159, Cheonggyecheon-ro, Jongno-gu, Seoul, Korea
tel/ 82-1644-5897 fax/ 82-2-2278-2276
www.sd-ultra.com

SD-B301H

FEATURE

- Simple operation
  Set up to 40min. at every 5min intervals.
- Strong cleaning performance
  Built in powerful BLT vibrator.
- Thermostat function
  Control temperature 45~80℃
- Safe mode
  Automatically turn off without operation for 12 hours
- Drain function
  Built in a drain value to drain the liquid properly.
- Memory function
  Remember the value of last working time & temperature.

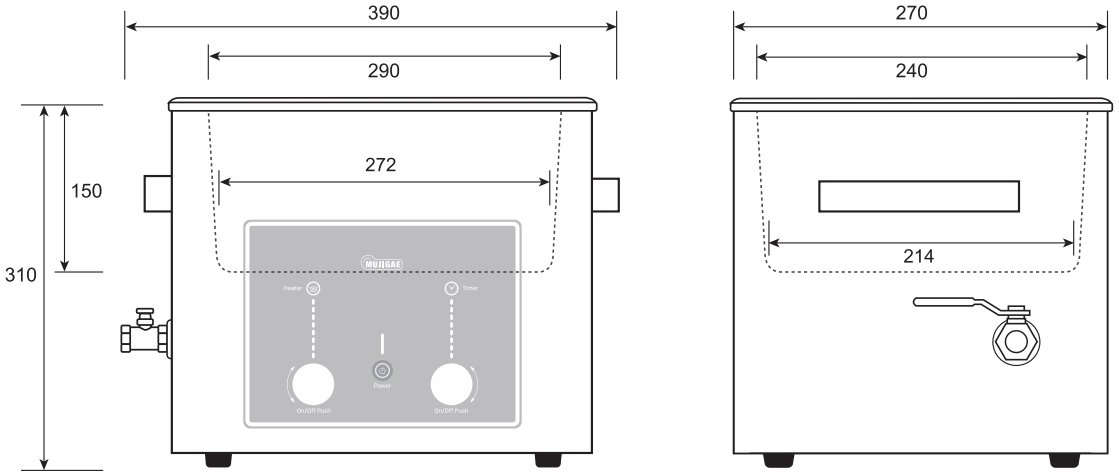

SPECIFICATIONS

Model	SD-B301H
Inside Diameter	290(W) x 240(L) x 150(H)
Outside Diameter	390(W) x 270(L) x 310(H)
Capacity	10L
Ultrasonic Frequency	28kHz
Ultrasonic Output	250W
Power Consumption	484W
Gross Weight	8.9kg(Net Weight) / 10.4kg(Gross Weight)
Power	AC220V / 60Hz
Heat Capacity	240W
Operation Time	Operation time : 40min. Thermostat : 45~80℃
Materials	Tub: SUS-304, Body: SUS-430
Parts	Cover(SUS-304), Fuse x 2, Manual, Hose, Hose nipple, Hose band
Accessory	BT-300